




# TECHNICAL DATA

Three Phase Electric Motors - Cast Iron Frame  
 HE30 100 L1 4 IE2  
 2.2 kW / 3 Cv  
 1440 RPM

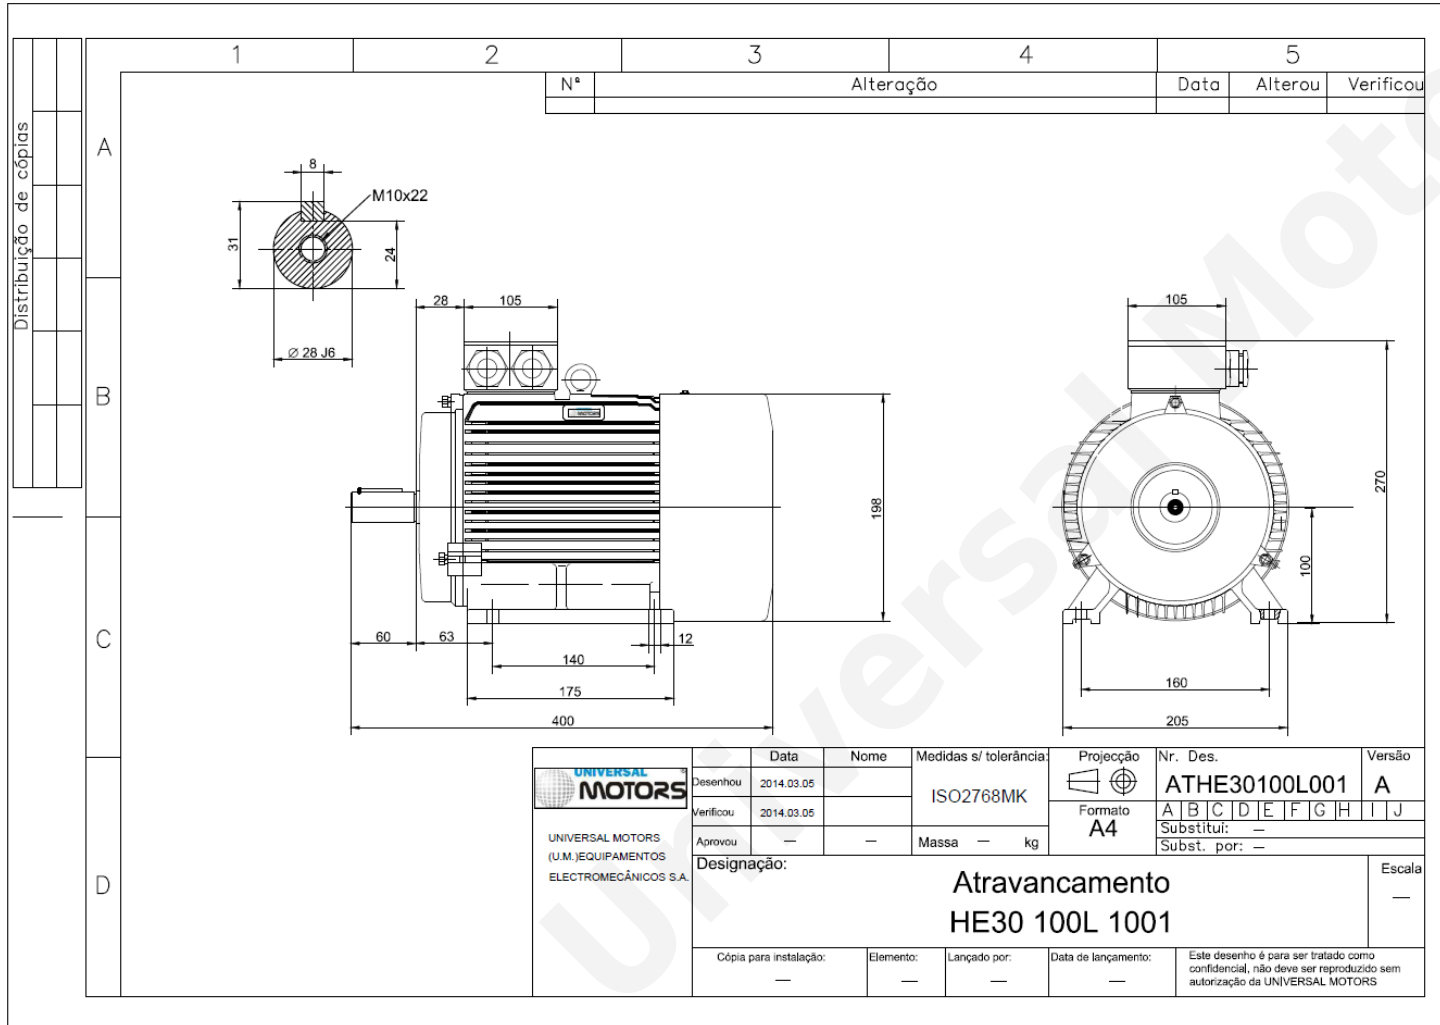

Motor type:	<b>HE30 100 L1 4 IE2</b>
Output:	<b>2.2 kW / 3 Cv</b>
Speed (min <sup>-1</sup> ):	<b>1440 RPM</b>
Frequency:	<b>50 Hz</b>
Voltage:	<b>400 V</b>
Current:	<b>4.7 A</b>
Power factor (Cos Ø):	<b>0.81</b>
Poles:	<b>4</b>
Insulation class:	<b>F</b>
Temperature rise Class:	<b>B</b>
Efficiency 50%:	<b>84.0 %</b>
Efficiency 75%:	<b>85.3 %</b>
Efficiency 100%:	<b>84.3 %</b>
Torque:	<b>14.6 N.m</b>
Tstarting/Tnominal:	<b>2.3</b>
Istarting/Inominal:	<b>7.8</b>
Tmaximum/Tnominal:	<b>2.3</b>
Noise:	<b>53 Db(A)</b>
Weight:	<b>42 Kg</b>
Bearing DE:	<b>6206 2Z C3</b>
Bearing NDE:	<b>6206 2Z C3</b>

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

**CONTACTS:**

UNIVERSAL MOTORS      Tel: +351 252 299 080  
 Rua de São Brás,745      Fax: +351 252 299 089  
 4480-782 VILA DO CONDE      Mail: [geral@universalmotors.pt](mailto:geral@universalmotors.pt)

\* References applied only in the UK