




TECHNICAL DATA

Three Phase Electric Motors - Cast Iron Frame
 HE30 280 S-2 IE2
 75 kW / 100 Cv
 2975 RPM

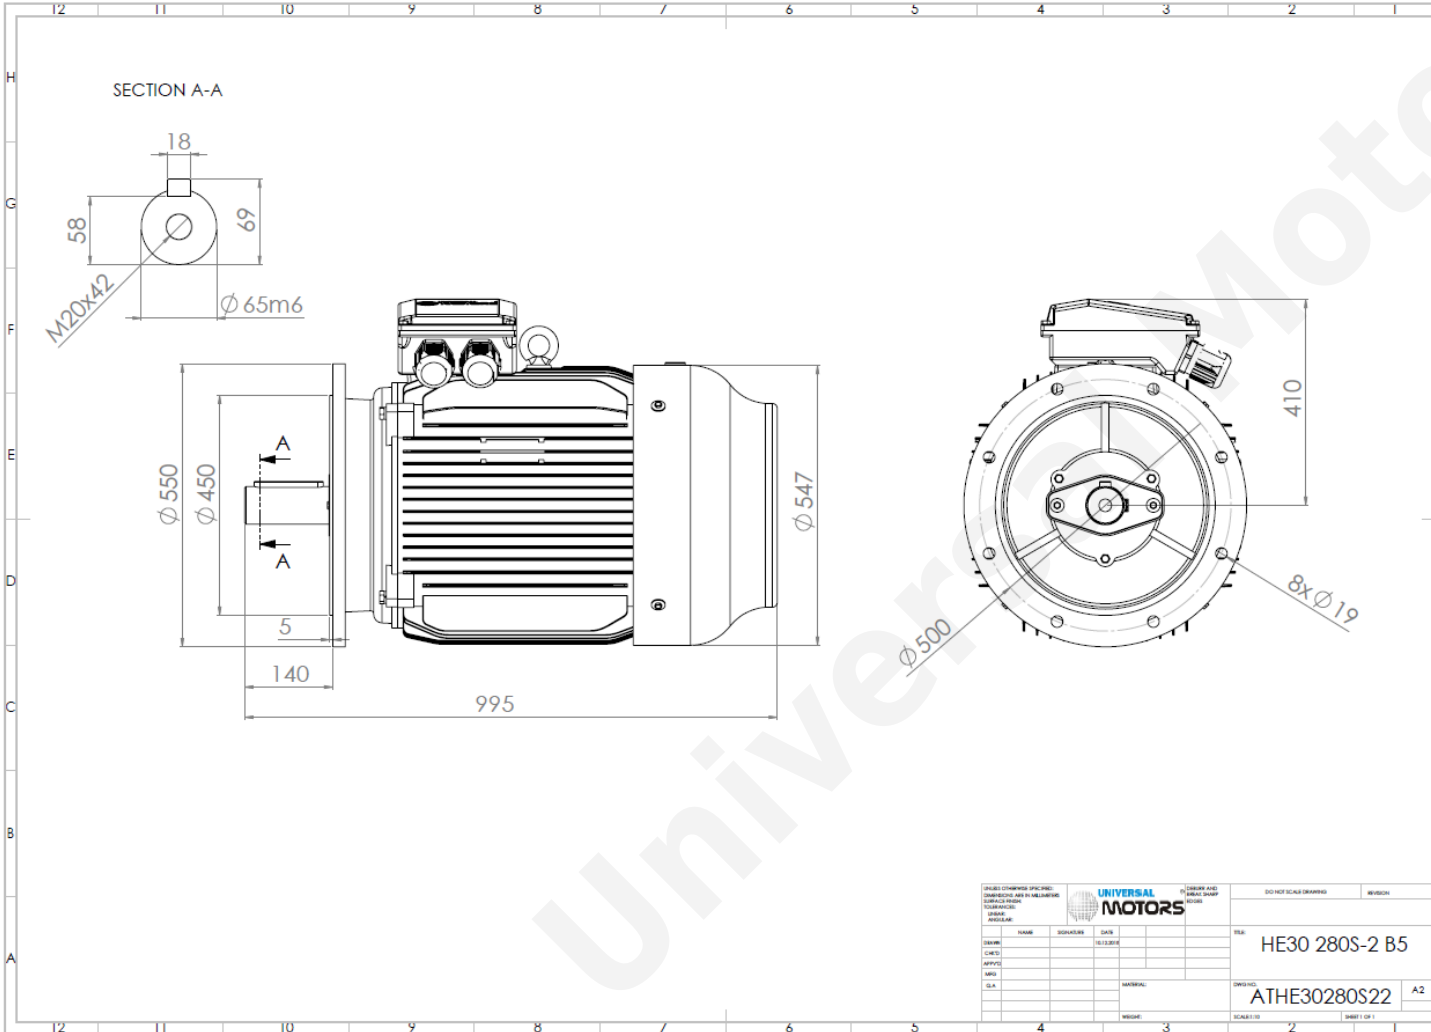

Motor type:	HE30 280 S-2 IE2
Output:	75 kW / 100 Cv
Speed (min ⁻¹):	2975 RPM
Frequency:	50 Hz
Voltage:	400 V
Current:	130 A
Power factor (Cos Ø):	0.89
Poles:	2
Insulation class:	F
Temperature rise Class:	B
Efficiency 50%:	93.1 %
Efficiency 75%:	94.3 %
Efficiency 100%:	93.8 %
Torque:	241 N.m
Tstarting/Tnominal:	2.0
Istarting/Inominal:	6.9
Tmaximum/Tnominal:	2.3
Noise:	80 Db(A)
Weight:	520 Kg
Bearing DE:	6314 C3
Bearing NDE:	6314 C3

UNIVERSAL MOTORS		DO NOT SCALE DRAWING	REVISION
DESIGN	HE30 280S-2 B5		
DATE	16/12/2016		
DRAWN	ATHE30280S22		
SHEET 1 OF 1			

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

CONTACTS:

UNIVERSAL MOTORS Tel: +351 252 299 080
 Rua de São Brás,745 Fax: +351 252 299 089
 4480-782 VILA DO CONDE Mail: geral@universalmotors.pt

* References applied only in the UK