


# TECHNICAL DATA

Three Phase Electric Motors - Cast Iron Frame  
 PE30 132 S1 2 IE3  
 5.5 kW / 7.5 Cv  
 2940 RPM

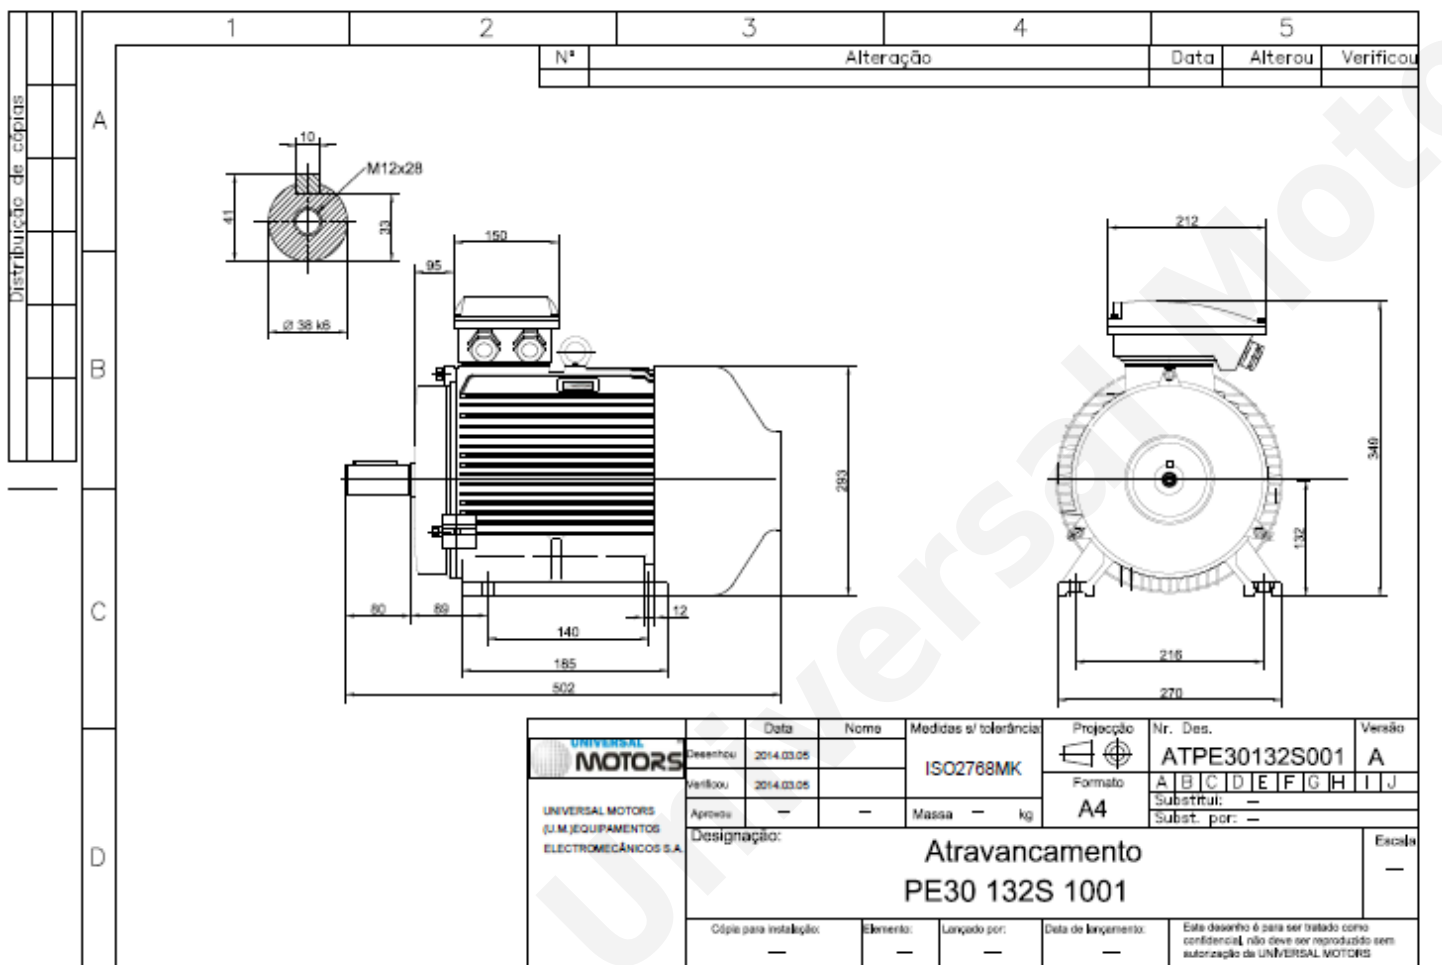

Motor type:	<b>PE30 132 S1 2 IE3</b>
Output:	<b>5.5 kW / 7.5 Cv</b>
Speed (min <sup>-1</sup> ):	<b>2940 RPM</b>
Frequency:	<b>50 Hz</b>
Voltage:	<b>400 V</b>
Current:	<b>10.1 A</b>
Power factor (Cos Ø):	<b>0.88</b>
Poles:	<b>2</b>
Insulation class:	<b>F</b>
Temperature rise Class:	<b>B</b>
Efficiency 50%:	<b>88.6 %</b>
Efficiency 75%:	<b>89.7 %</b>
Efficiency 100%:	<b>89.4 %</b>
Torque:	<b>18 N.m</b>
Tstarting/Tnominal:	<b>2.0</b>
Istarting/Inominal:	<b>8.3</b>
Tmaximum/Tnominal:	<b>2.3</b>
Noise:	<b>79 Db(A)</b>
Weight:	<b>60 Kg</b>
Bearing DE:	<b>6308 2Z C3</b>
Bearing NDE:	<b>6208 2Z C3</b>

**Regime - S1**

**Altitude - 1000m**

**Environment Temperature - 40°C**

**CONTACTS:**

UNIVERSAL MOTORS      Tel: +351 252 299 080  
 Rua de São Brás,745      Fax: +351 252 299 089  
 4480-782 VILA DO CONDE      Mail: [geral@universalmotors.pt](mailto:geral@universalmotors.pt)

\* References applied only in the UK