




TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame
 UM2A 132M3-4
 11 kW / 15 Cv
 1460 RPM

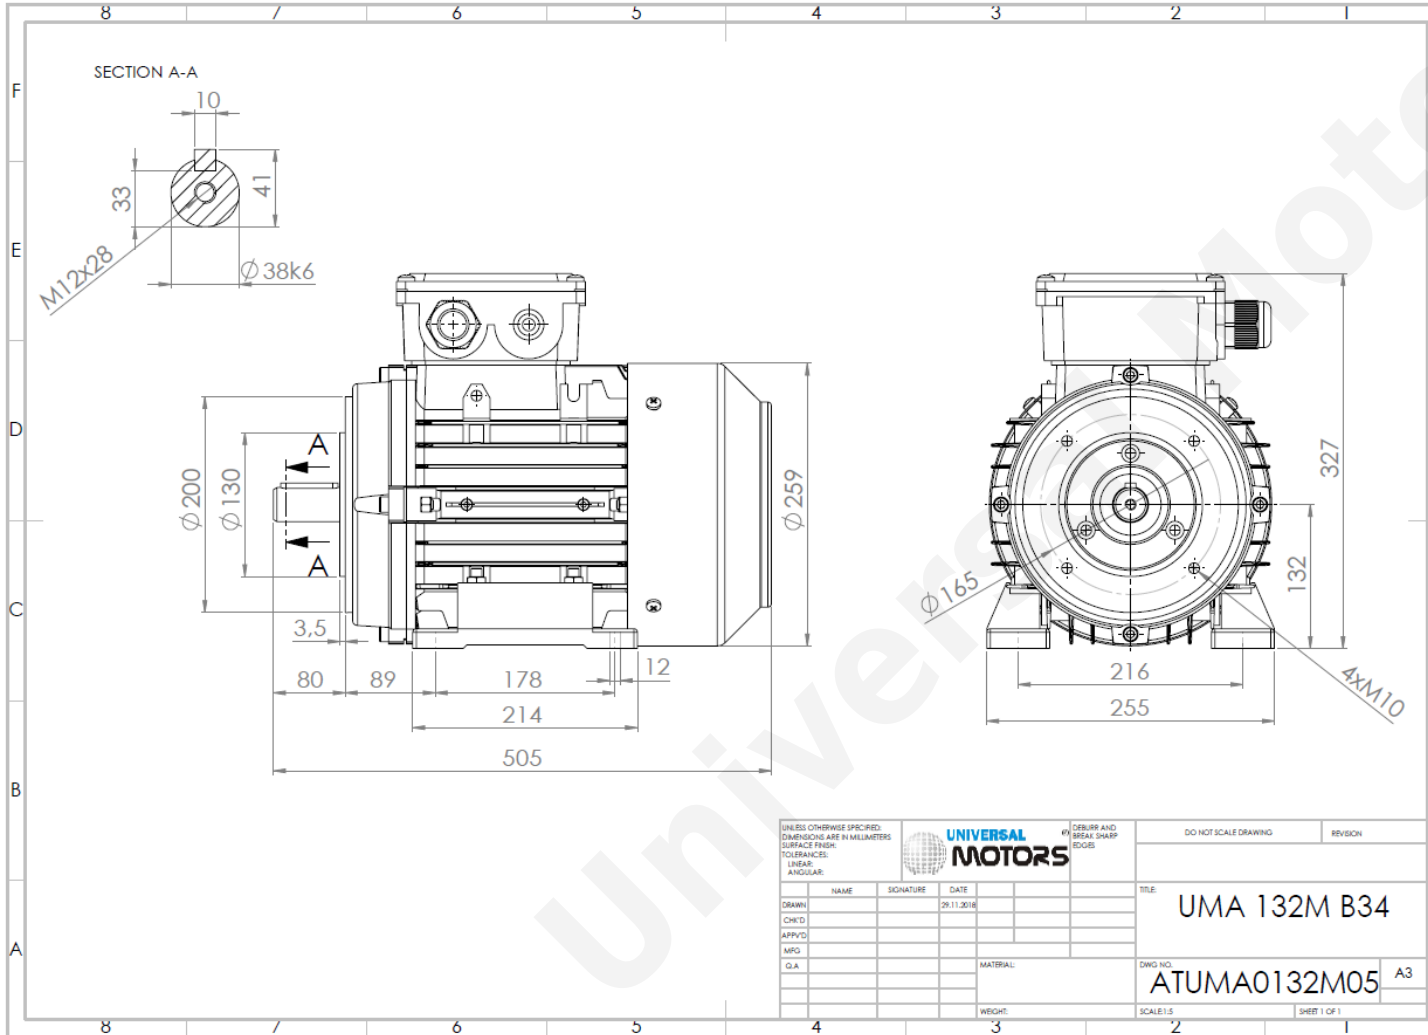

Motor type:	UM2A 132M3-4
Output:	11 kW / 15 Cv
Speed (min ⁻¹):	1460 RPM
Frequency:	50 Hz
Voltage:	400 V
Current:	20.8 A
Power factor (Cos ϕ):	0.85
Poles:	4
Insulation class:	F
Temperature rise Class:	B
Efficiency 50%:	90.1 %
Efficiency 75%:	90.5 %
Efficiency 100%:	89.8 %
Torque:	71.9 N.m
Tstarting/Tnominal:	3.3
Istarting/Inominal:	9.3
Tmaximum/Tnominal:	3.6
Noise:	75 Db(A)
Weight:	66.2 Kg
Brake AC:	AC7
Torque Brake DC:	80 N.m
Bearing DE:	6308 2Z
Bearing NDE:	6208 2Z
Torque Brake AC:	90 N.m
Brake DC:	REB-05-16

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

CONTACTS:

UNIVERSAL MOTORS Tel: +351 252 299 080
 Rua de São Brás,745 Fax: +351 252 299 089
 4480-782 VILA DO CONDE Mail: geral@universalmotors.pt

* References applied only in the UK