




# TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame  
 UM2A 71M1-6  
 0.18 kW / 0.25 Cv  
 850 RPM

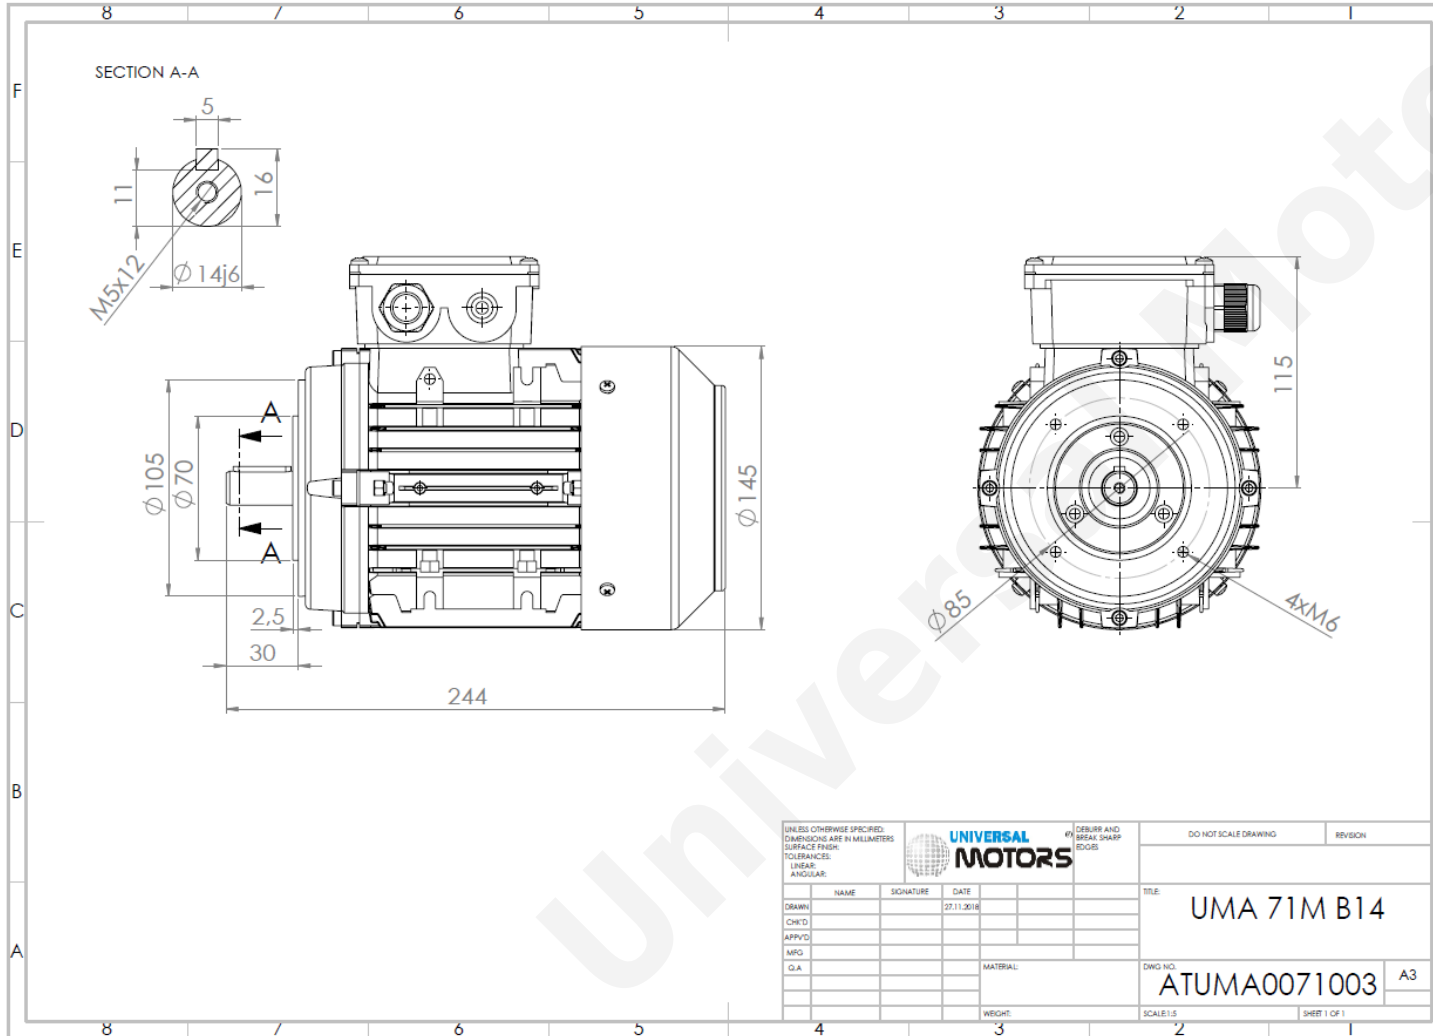

Motor type:	<b>UM2A 71M1-6</b>
Output:	<b>0.18 kW / 0.25 Cv</b>
Speed (min <sup>-1</sup> ):	<b>850 RPM</b>
Frequency:	<b>50 Hz</b>
Voltage:	<b>400 V</b>
Current:	<b>0.69 A</b>
Power factor (Cos $\phi$ ):	<b>0.67</b>
Poles:	<b>6</b>
Insulation class:	<b>F</b>
Temperature rise Class:	<b>B</b>
Efficiency 50%:	<b>46.3 %</b>
Efficiency 75%:	<b>54.4 %</b>
Efficiency 100%:	<b>56.6 %</b>
Torque:	<b>1.93 N.m</b>
Tstarting/Tnominal:	<b>1.9</b>
Istarting/Inominal:	<b>3.1</b>
Tmaximum/Tnominal:	<b>2.2</b>
Noise:	<b>52 Db(A)</b>
Weight:	<b>5.0 Kg</b>
Brake AC:	<b>AC2</b>
Torque Brake DC:	<b>4 N.m</b>
Bearing DE:	<b>6202 2Z</b>
Bearing NDE:	<b>6202 2Z</b>
Torque Brake AC:	<b>10 N.m</b>
Brake DC:	<b>REB-05-06</b>

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

## CONTACTS:

UNIVERSAL MOTORS Tel: +351 252 299 080  
 Rua de São Brás, 745 Fax: +351 252 299 089  
 4480-782 VILA DO CONDE Mail: [geral@universalmotors.pt](mailto:geral@universalmotors.pt)

\* References applied only in the UK