




TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame

UM2A 80M3-4

1.1 kW / 1.5 Cv

1420 RPM

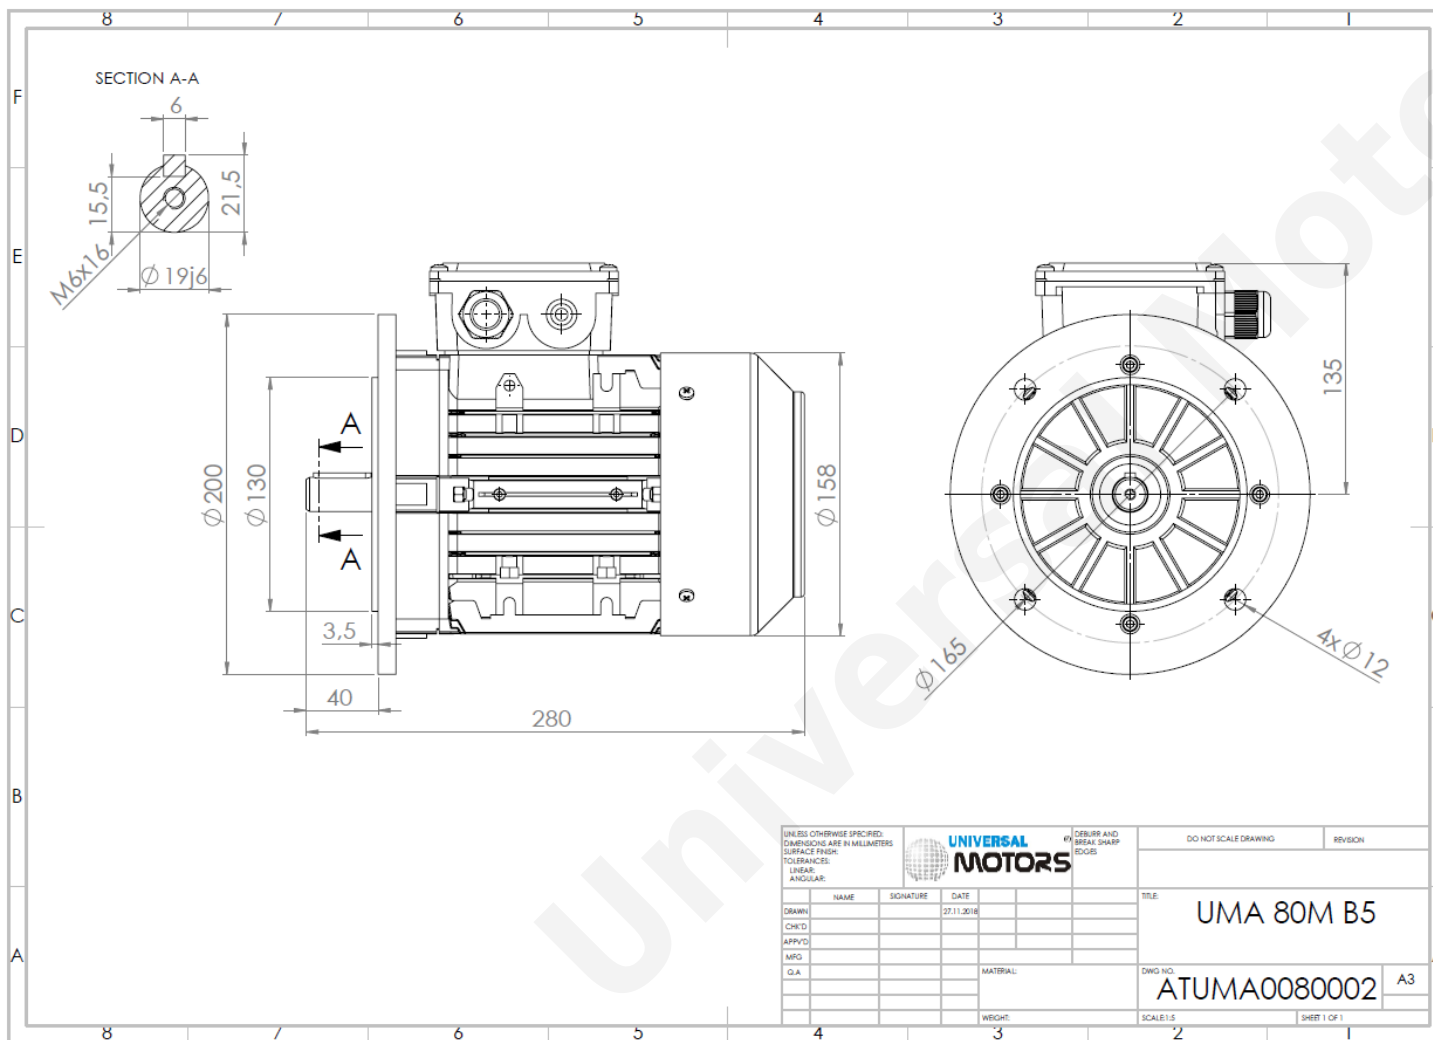

Motor type:	UM2A 80M3-4
Output:	1.1 kW / 1.5 Cv
Speed (min ⁻¹):	1420 RPM
Frequency:	50 Hz
Voltage:	400 V
Current:	2.71 A
Power factor (Cos Ø):	0.72
Poles:	4
Insulation class:	F
Temperature rise Class:	B
Efficiency 50%:	79.7 %
Efficiency 75%:	81.9 %
Efficiency 100%:	81.4 %
Torque:	7.4 N.m
Tstarting/Tnominal:	3.1
Istarting/Inominal:	5.9
Tmaximum/Tnominal:	3.1
Noise:	61 Db(A)
Weight:	12.3 Kg
Brake AC:	AC3
Torque Brake DC:	8 N.m
Bearing DE:	6204 2Z
Bearing NDE:	6204 2Z
Torque Brake AC:	15 N.m
Brake DC:	REB-05-08

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

CONTACTS:

UNIVERSAL MOTORS Tel: +351 252 299 080
 Rua de São Brás,745 Fax: +351 252 299 089
 4480-782 VILA DO CONDE Mail: geral@universalmotors.pt

* References applied only in the UK