




TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame
 UM3A 80M3-6 IE3
 0.75 kW / 1 Cv
 935 RPM

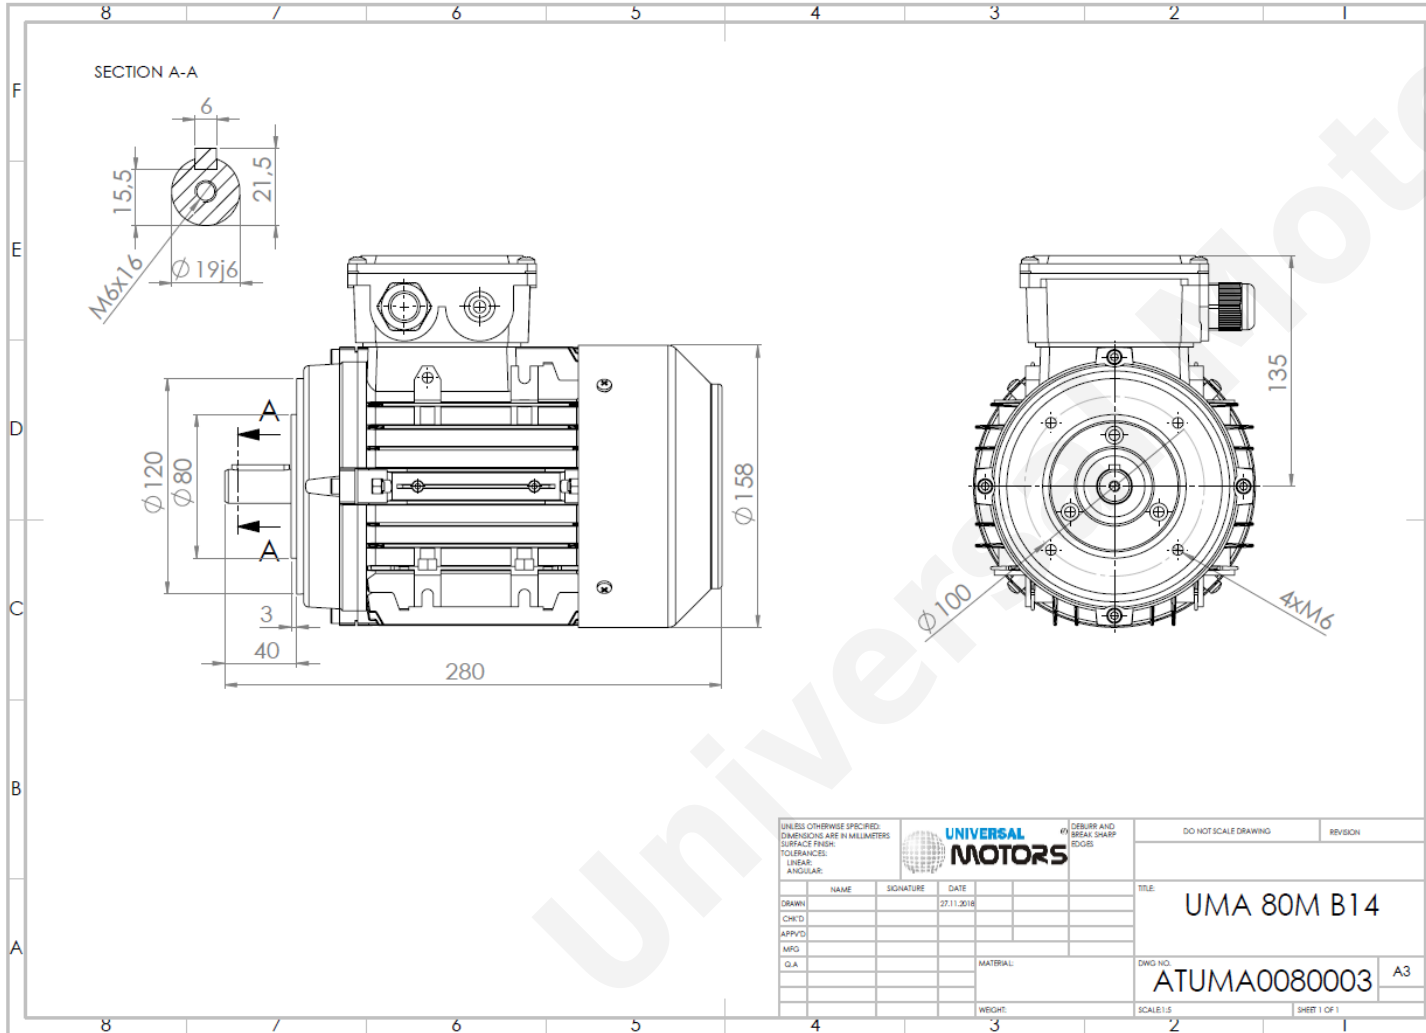

| | |
|-----------------------------|------------------------|
| Motor type: | UM3A 80M3-6 IE3 |
| Output: | 0.75 kW / 1 Cv |
| Speed (min ⁻¹): | 935 RPM |
| Frequency: | 50 Hz |
| Voltage: | 400 V |
| Current: | 2.18 A |
| Power factor (Cos Ø): | 0.63 |
| Poles: | 6 |
| Insulation class: | F |
| Temperature rise Class: | B |
| Efficiency 50%: | 74.4 % |
| Efficiency 75%: | 78.2 % |
| Efficiency 100%: | 78.9 % |
| Torque: | 7.7 N.m |
| Tstarting/Tnominal: | 2.8 |
| Istarting/Inominal: | 4.9 |
| Tmaximum/Tnominal: | 3.1 |
| Noise: | 59 Db(A) |
| Weight: | 12.5 Kg |
| Brake AC: | AC3 |
| Torque Brake DC: | 8 N.m |
| Bearing DE: | 6204 2Z |
| Bearing NDE: | 6204 2Z |
| Torque Brake AC: | 15 N.m |
| Brake DC: | REB-05-08 |

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

CONTACTS:

UNIVERSAL MOTORS Tel: +351 252 299 080
 Rua de São Brás,745 Fax: +351 252 299 089
 4480-782 VILA DO CONDE Mail: geral@universalmotors.pt

* References applied only in the UK