




# TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame  
 UM3A 90L2-6 IE3  
 1.5 kW / 2 Cv  
 950 RPM

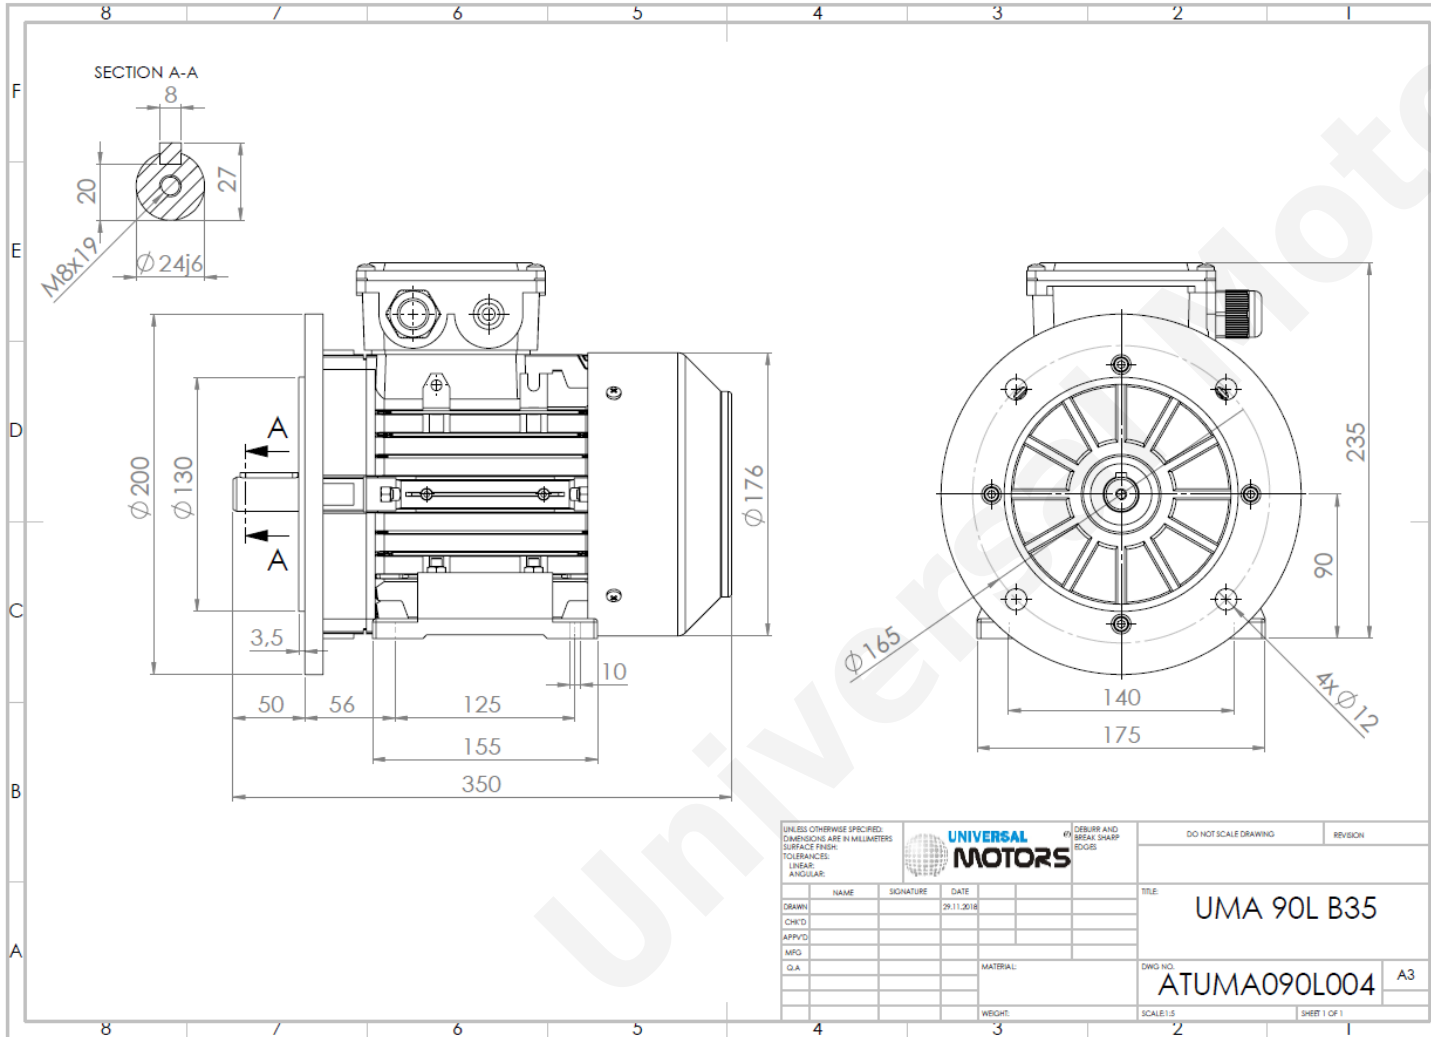

Motor type:	<b>UM3A 90L2-6 IE3</b>
Output:	<b>1.5 kW / 2 Cv</b>
Speed (min <sup>-1</sup> ):	<b>950 RPM</b>
Frequency:	<b>50 Hz</b>
Voltage:	<b>400 V</b>
Current:	<b>3.92 A</b>
Power factor (Cos Ø):	<b>0.67</b>
Poles:	<b>6</b>
Insulation class:	<b>F</b>
Temperature rise Class:	<b>B</b>
Efficiency 50%:	<b>80.5 %</b>
Efficiency 75%:	<b>82.7 %</b>
Efficiency 100%:	<b>82.5 %</b>
Torque:	<b>15 N.m</b>
Tstarting/Tnominal:	<b>2.9</b>
Istarting/Inominal:	<b>5.6</b>
Tmaximum/Tnominal:	<b>3.0</b>
Noise:	<b>61 Db(A)</b>
Weight:	<b>21.3 Kg</b>
Brake AC:	<b>AC4</b>
Torque Brake DC:	<b>16 N.m</b>
Bearing DE:	<b>6205 2Z</b>
Bearing NDE:	<b>6205 2Z</b>
Torque Brake AC:	<b>20 N.m</b>
Brake DC:	<b>REB-05-10</b>

Regime - S1

Altitude - 1000m

Environment Temperature - 40°C

## CONTACTS:

UNIVERSAL MOTORS Tel: +351 252 299 080  
 Rua de São Brás,745 Fax: +351 252 299 089  
 4480-782 VILA DO CONDE Mail: [geral@universalmotors.pt](mailto:geral@universalmotors.pt)

\* References applied only in the UK